GA DRAWING

NO. OF RELAYS	9
NO. OF BUTTONS	6
SAFETY RELAY	YES

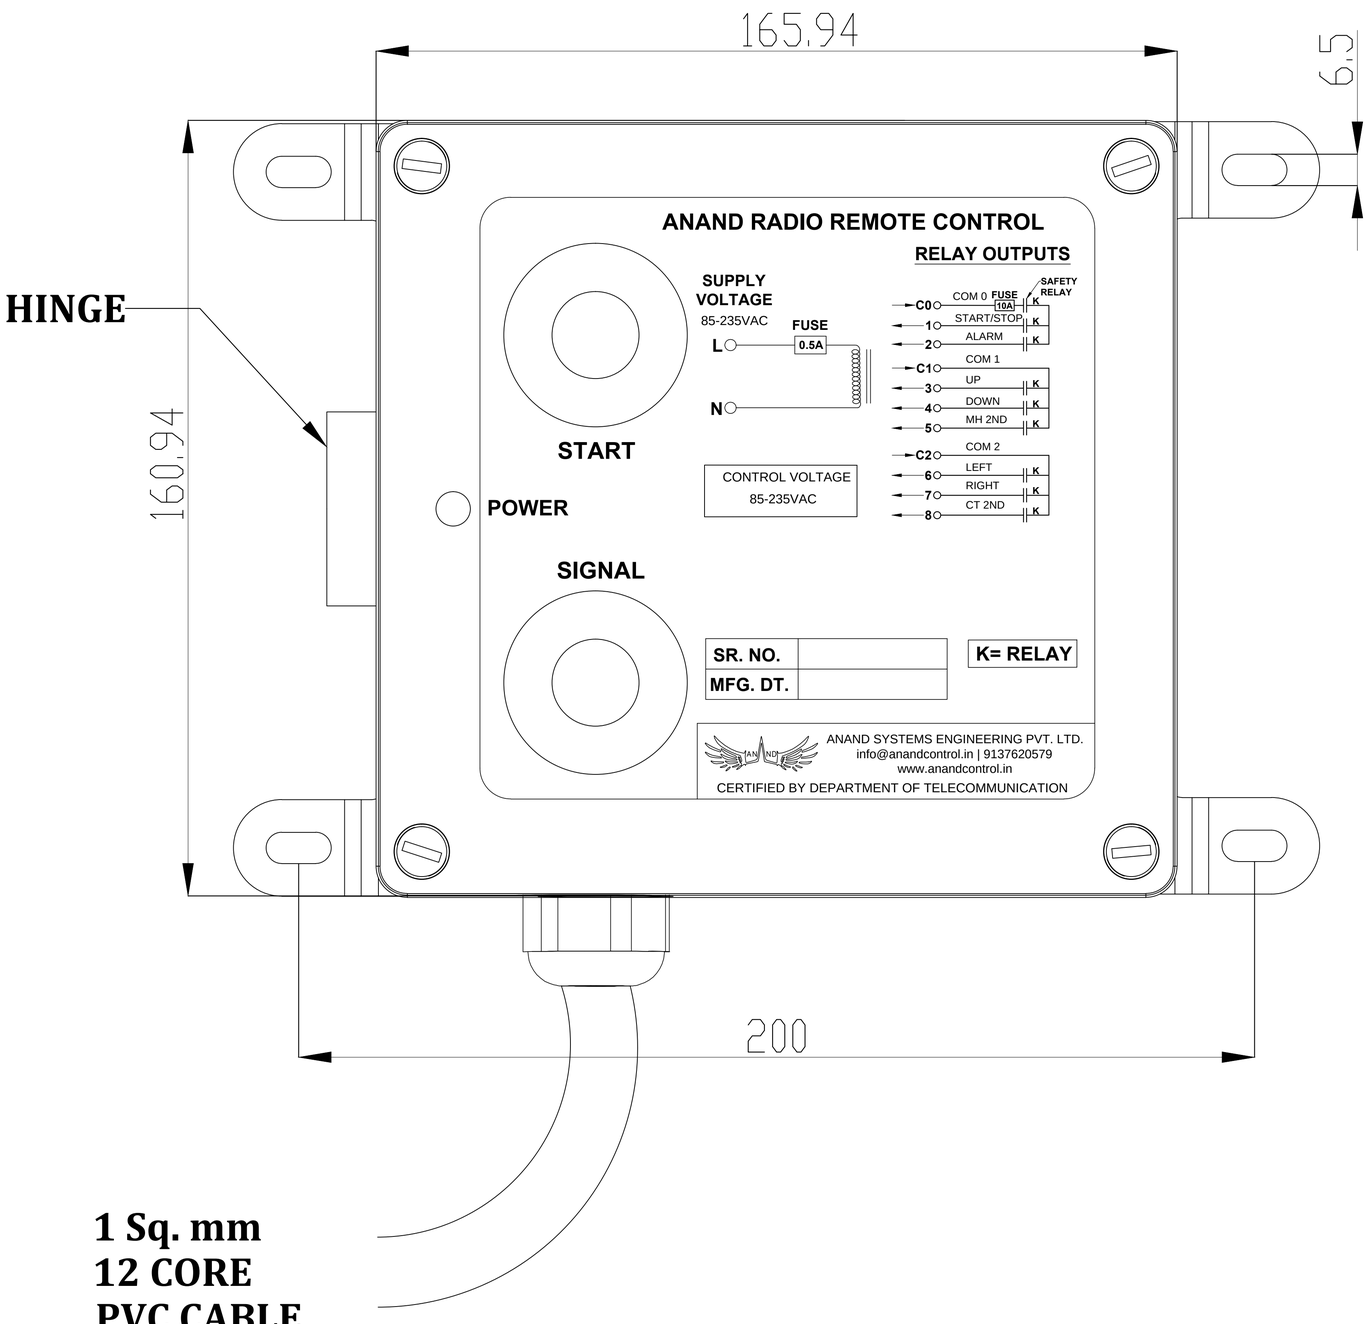

1 Sq. mm
12 CORE
PVC CABLE

RECEIVER

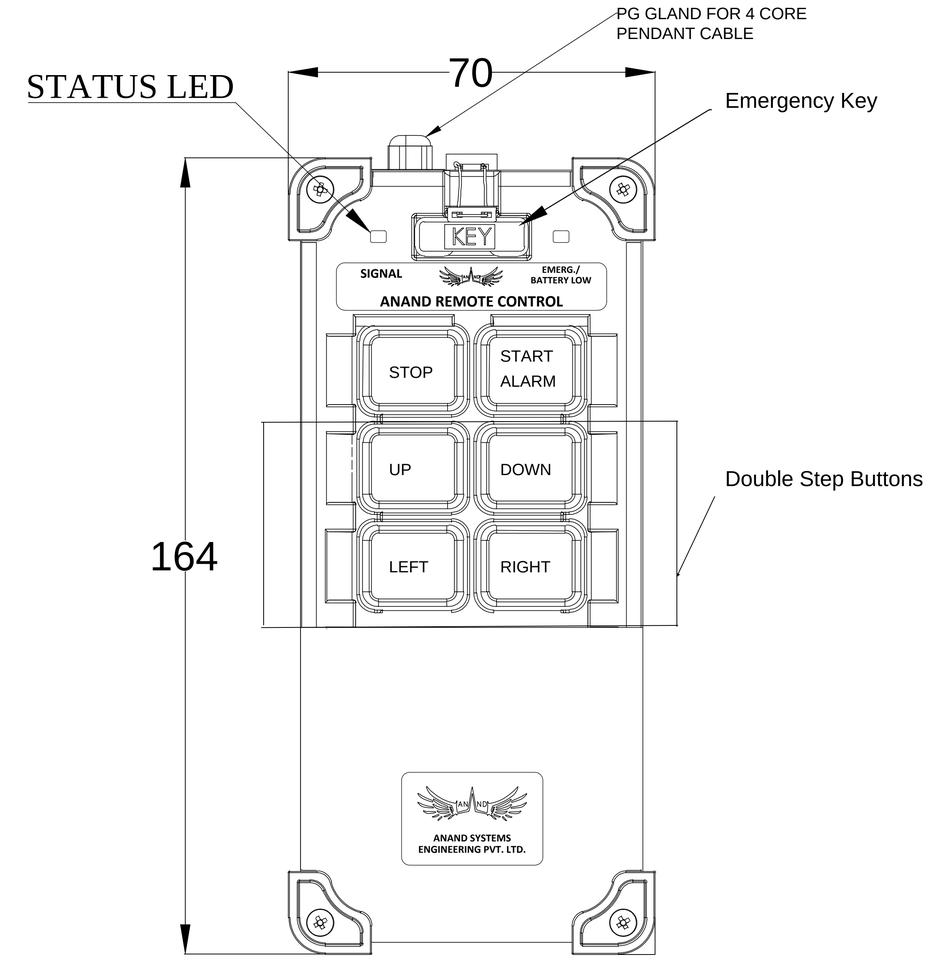

PENDANT

TO CLIENT:

ANAND SYSTEMS ENGINEERING PVT. LTD.
MUMBAI- 400 072.

Prepared by	vivek	23-03-2024	TITLE: 6 BUTTON 2 SPEED PENDANT
Checked by			
Approved by			

REV.	SIZE	MODEL:-	SCALE: 1:2
R0	A4	APC-602	SHEET: 1 OF 2

Ref. Drawing No.: SL NO-

Cad file:

WIRING DIAGRAM

ANAND RADIO REMOTE CONTROL

START

POWER

SIGNAL

SUPPLY VOLTAGE
85-235VAC

FUSE
0.5A

L

N

CONTROL VOLTAGE
85-235VAC

RELAY OUTPUTS

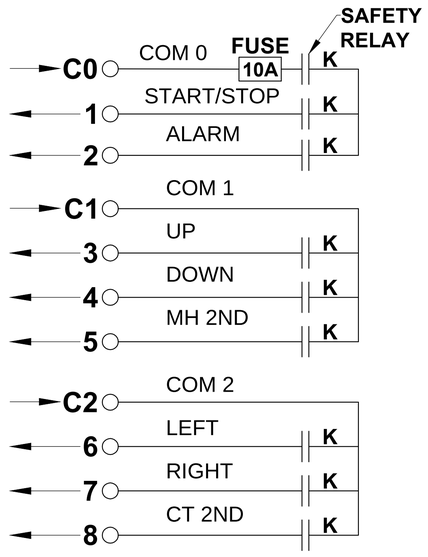

SR. NO.	
MFG. DT.	

K= RELAY

ANAND SYSTEMS ENGINEERING PVT. LTD.
info@anandcontrol.in | 9137620579
www.anandcontrol.in

CERTIFIED BY DEPARTMENT OF TELECOMMUNICATION

PUSH BUTTON - RELAY MAP

PUSH BUTTON	RELAY ON
START/STOP	0,1
ALARM	2
UP	3
UP 2ND STEP	3,5
DOWN	4
DOWN 2ND STEP	4,5
LEFT	6
LEFT 2ND STEP	6,8
RIGHT	7
RIGHT 2ND STEP	7,8

INTERLOCK

MOTION
STOP ALONG WITH START ALARM KEY
UP ALONG WITH DOWN KEY
LEFT ALONG WITH RIGHT KEY

EMERGENCY

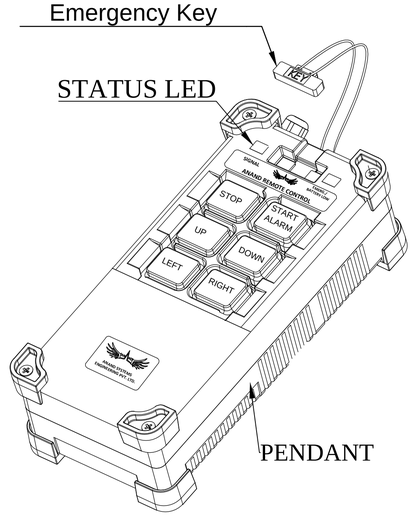

TO CLIENT:

ANAND SYSTEMS ENGINEERING PVT. LTD. MUMBAI-400 072.			
Prepared by	vivek	23-03-2024	TITLE: 6 BUTTON 2 SPEED PENDANT
Checked by			
Approved by			
REV. R0	SIZE A4	MODEL:- APC-602	SCALE: 1:2
			SHEET: 2 OF 2
Ref. Drawing No.: SL NO-			Cad file: